

Tauri Series Temperature-Check Tablets **3 second scan from 3ft with +/- 0.5°C accuracy**



TTS-10
10"

TTS-15
15.6"

TTS-21
21.5"

Add an extra layer of protection to your facility and help protect your most valuable assets - your human assets.




Medical



Education



Corporate

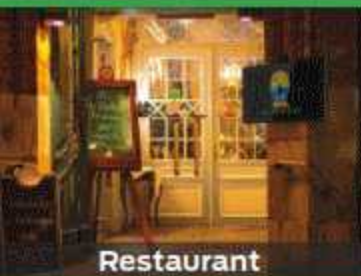

Restaurant



Airport



Retail

Increase safety with a quick temperature check

To ensure that people entering a location are not running a high temperature, Aurora introduces the new infrared temperature sensor/detector. It provides alerts when a person is running a high temperature in less than 3 seconds.

The system uses an advanced algorithm for detecting and calculating heat signatures. Based on technology developed in Germany, the highly accurate sensor measures with a tolerance of +/- 0.5 degrees Celsius (+/- 0.9 degrees Fahrenheit).

Why a temperature sensor?

- Provides the first layer of screening protection
- More hygienic with non-touch infrared technology
- Multiple devices can be monitored by a single user

Specifications:

- Scan distance: 0.5 to 1 meter (approx. 1' 8" to 3' 3")
- Accuracy: +/- 0.5°C (+/- 0.9°F)
- Scan speed: within 3 seconds
- 10", 15.6", and 21.5" models
- Quad-core 1.8Ghz processor
- WiFi and PoE Ethernet (PoE on 10" & 15" models only)
- VESA compatible mounting

Options

- APS-1 adjustable pole stand with weighted base
- WMT-1 VESA wall mount
- Future firmware upgrade options
 - Photo & thermal result email alerts
 - Facial recognition
 - Customized flagging
 - ReAX control
 - Integration with third-party control and access systems



TTS-10 shown with optional APS-1 pole stand